

Torque Solutions Front Engine Mount (Lancer Evolution X)

Tools Needed: Jack

Jack stands

Flathead screwdriver

10mm socket and wrench

14mm socket and open wrench

Extension for socket wrench

Installation Instructions

-Jack up vehicle

-Place jack stands under vehicle

-remove jack (will use again later)

-remove 10mm bolts and plastic clips from plastic underbody cover



-remove and place covers aside

-place floor jack under drivers side engine block (there is a metal square that extends from the block, use this as the jack point)




-Do not jack engine up, just support the weight

-Remove 14mm carriage bolt with wrench and 14mm open wrench from stock mount



-Remove 2 14mm bolts from bottom of stock mount

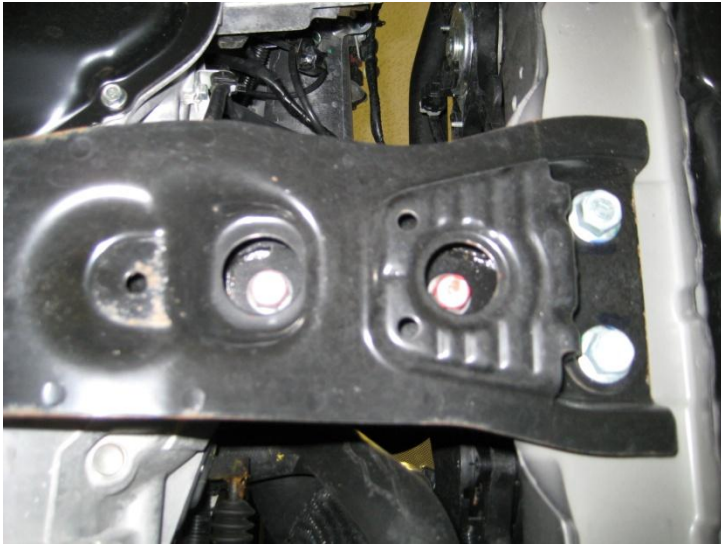

-Remove and install new mount



-Tighten down new mount

-Lower jack

-Replace plastic cover

-Lower vehicle

-Take a test drive



